



Levo Series

Digital Clocks

Easily viewed from up to 150 feet away, our Levo Series clocks improve the accuracy and efficiency of your entire organization. Digital Clocks arrive preconfigured to be able to access your existing IT network via Ethernet to quickly synchronize to the exact second and communicate with the intuitive OneVue software. When the clocks are delivered, just plug them in and hang them on the wall to keep your organization running on time, even through power outages and Daylight Saving Time shifts.

Designed for Visibility and Reliability

Sleek, low-profile digital clocks feature bright LED digits to keep your facility in sync and running on time. The OneVue Web-based interface makes it easy for users to schedule clock status reports to learn if synchronization is off or maintenance is required.

Product Features:

- Highly visible 7-segment LED digits
- Three display dimmer options: 75%, 50% and 25%
- Power outage memory backup for up to 1 hour
- Choose Red or Green LED digits

DIGITAL CLOCKS

ONEVUE SURFACE-MOUNT MODELS WITH 2.5" DIGITS

4-Digit	6-Digit	Description
C2005X200	C2005X202	4° Slope Bracket, PoE
C2005X212	C2005X419	18° Slope Bracket, PoE

ONEVUE SURFACE-MOUNT MODELS WITH 4" DIGITS

4-Digit	6-Digit	Description
C2005X201	C2005X203	4° Slope Bracket, PoE

ONEVUE FLUSH-MOUNT MODELS WITH 2.5" DIGITS

6-Digit	Description
C2005X202F	PoE

- Add a "G" after the item number for green LED models
Example: C2007A200G or C2005X202FG

DUAL CLOCK BRACKET KIT

Any two surface-mount digital clocks can be mounted back-to-back to provide greater visibility in hallways and larger areas. Select the correct Dual Clock Bracket Kit for your application below.

DUAL CLOCK BRACKET KIT

Mount	2", 4-Digit	2", 6-Digit	4", 4-Digit	4", 6-Digit*
Ceiling	24CBRK	26CBRK	4XBRK	4XBRK
Wall	24WBRK	26WBRK	4XBRK	NA

- * 4" 6-digit Clock can be ceiling mount only.



Surface Mount



Flush-Mount

Includes clock, junction box and face plate.



Dual Mount - Ceiling




Dual Mount - Wall

DIGITAL CLOCK SPECIFICATIONS:

- 12- or 24-hour time display
- PM indicator light
- Automatically adjust for Daylight Saving Time
- Alternating time and date display option
- LED dimmer option (75%, 50%, 25%)
- Power outage memory backup for up to 1 hour
- Operating temperature range: 32°- 95°F (0°- 35°C)
- Storage temperature range: -20°-185°F (-29°- 85°C)
- Clock configuration to access your network is accomplished online prior to delivery for plug-and-play convenience.
- Clock Power: PoE 802.3 at/af compatible
- Network connectivity via RJ45 (Ethernet)
- Certification: FCC/IC/CE marked
- Peak power consumption: 12.9 watts (class 3)

SINGLE CLOCK DIMENSIONS

Clock Type	Weight	Height	Width	Depth
		A	B	C
2.5" (6.4cm), 4-digit	1.8 lbs. (0.8 kg)	5.0" (12.7cm)	10.8" (27.4cm)	2.8" (5.6cm)
4" (10.16cm), 4-digit	3.9 lbs. (1.8 kg)	8.0" (20.3cm)	17.9" (45.5cm)	2.4" (6.1cm)
2.5" (6.4cm), 6-digit	2.0 lbs. (0.9 kg)	5.0" (12.7cm)	13.8" (34.9cm)	2.2" (5.6cm)
4" (10.16cm), 6-digit	4.6 lbs. (2.1 kg)	8.0" (20.3cm)	23.3" (59.2cm)	2.4" (6.1cm)

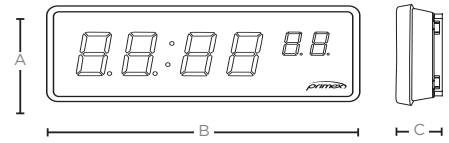

DUAL-MOUNT DIMENSIONS

Clock Type	Width from Wall	Height from Ceiling	Depth of Two Clocks
	A	B	C
Dual 2.5" (6.4cm), 4-digit	13.8" (35.1cm)	8.0" (20.3cm)	5.9" (15.0cm)
Dual 4" (10.16cm), 4-digit	20.9" (53.1cm)	11.0" (27.9cm)	6.3" (16.0cm)
Dual 2.5" (6.4cm), 6-digit	16.8" (42.7cm)	8.0" (20.3cm)	5.9" (15.0cm)
Dual 4" (10.16cm), 6-digit	NA*	11.0" (27.9cm)	6.3" (16.0cm)




* 4", 6-digit clocks cannot be dual-mounted to the wall.

Note: Dual mount clocks shipped disassembled to simplify installation.

FLUSH-MOUNT DIMENSIONS

Clock Type	Weight	Width	Height	Depth
		A	B	C
2.5" (6.4cm), 6-digit	2.0 lbs. (0.9 kg)	16.8" (42.7cm)	6.5" (16.5cm)	3.4" (8.6cm)

When ordering for new construction projects, the junction boxes for flush-mount installation may be ordered to ship in advance of clocks. Please request special shipping and provide dates when ordering.

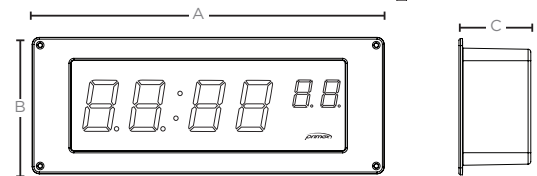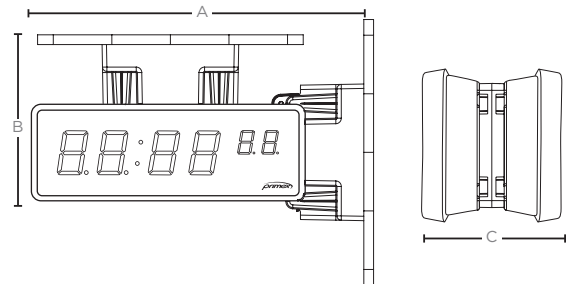

To Learn More:
Call 800.537.0464
Email: info@primexinc.com

primexinc.com



OneVue is a trademark of Primex. The innovative technology software solution for facility and time synchronization monitoring and reporting. All other trademarks are the property of their respective owners.

©2017 Primex. The Primex logo is a registered trademark of Primex. All Rights Reserved. 4.17