



Levo Series

Digital Clocks

Sleek, low-profile design puts the focus on the bright LED digits to keep your facility running on time. Our Levo Series clocks are designed to be easily viewed from up to 150 feet away. They synchronize seamlessly with your Primex 72MHz/GPS XR Series system using our proprietary 72MHz signal that transmits easily through common building materials and across longer distances with less potential for signal interference.

Automatically Adjust for Daylight Saving Time

Think of the time you and your team will save when you no longer need to manually adjust each and every clock in your facility after Daylight Saving Time shifts. Our Levo Series Digital Clocks feature highly visible 7-segment LED digits in a sleek black casing to integrate well into virtually any indoor environment. The on-board control panel allows you to select a variety of options, including alternating date/ time and 12 or 24 hour time display.

Product Features:

- Available in 120 VAC or 24 VAC input
- Highly visible, 7-segment LED digits
- Three display dimmer options: 75%, 50% and 25%
- Power outage memory backup for up to 1 hour
- Choose Red or Green LED digits
- Automatically adjusts for Daylight Saving Time

LEVO SERIES SURFACE-MOUNT MODELS WITH 2.5" DIGITS

4-Digit	6-Digit	Description
XRA7A200	XRA7A202	4° Slope Bracket, 120 VAC, 10' (3.0m) cord with plug
XRA7A212	XRA7A419	18° Slope Bracket, 120 VAC, 10' (3.0m) cord with plug
XRA2Y200	XRA2Y202	4° Slope Bracket, 24 VAC, 10" (25cm) cord with pigtail
XRA2Y212	XRA2Y419	18° Slope Bracket, 24 VAC, 10" (25cm) cord with pigtail

LEVO SERIES SURFACE-MOUNT MODELS WITH 4" DIGITS

4-Digit	6-Digit	Description
XRA7A201	XRA7A203	4° Slope Bracket, 120 VAC, 10' (3.0m) cord with plug
XRA2Y201	XRA2Y203	4° Slope Bracket, 24 VAC, 10" (25cm) cord with pigtail

LEVO SERIES FLUSH-MOUNT WITH 2.5" DIGITS

4-Digit	6-Digit	Description
NA	XRA7Y202F-1	120 VAC, 30" (76cm) cord with pigtail
NA	XRA2Y202F	24 VAC, 10" (25cm) cord with pigtail

DUAL CLOCK BRACKET KIT

Two surface-mount digital clocks can be mounted back-to-back to provide greater visibility in hallways and larger areas. Select the correct Dual Clock Bracket Kit for your application below.

DUAL CLOCK BRACKET KIT

Mount	2", 4-Digit	2", 6-Digit	4", 4-Digit	4", 6-Digit
Ceiling	24CBRK	26CBRK	4XBRK	4XBRK
Wall	24WBRK	26WBRK	4XBRK	NA

* 4", 6-digit clocks cannot be dual-mounted to the wall.

* Add a "G" after the item number for green LED models
Example: XRA7A202G OR XRA7Y202G-1



Surface Mount



Flush-Mount
Includes clock, junction box and face plate.



Dual Mount - Ceiling



Dual Mount - Wall



LEVO DIGITAL CLOCK SPECIFICATIONS:

- 7-segment LED digits
- 12- or 24-hour time display
- PM indicator light
- Alternating time and date display option
- LED dimmer option (75%, 50%, 25%)
- Operating temperature range: 32°-194°F (0°-35°C)
- Storage temperature range: -20°-185°F (-29°-85°C)

Power Supplies


- 120 VAC (100-240)/ 50-60 cycle, 10' (3.0m) cord with plug, UL/cUL listed
- 24 VAC (18-28), 10" (25cm) cord with pigtail

SINGLE CLOCK DIMENSIONS				
Clock Type	Weight	Height	Width	Depth
		A	B	C
2.5" (6.4cm), 4-digit	1.8 lbs. (0.8 kg)	5.0" (12.7cm)	10.8" (27.4cm)	2.8" (5.6cm)
4" (10.16cm), 4-digit	3.9 lbs. (1.8 kg)	8.0" (20.3cm)	17.9" (45.5cm)	2.4" (6.1cm)
2.5" (6.4cm), 6-digit	2.0 lbs. (0.9 kg)	5.0" (12.7cm)	13.8" (34.9cm)	2.2" (5.6cm)
4" (10.16cm), 6-digit	4.6 lbs. (2.1 kg)	8.0" (20.3cm)	23.3" (59.2cm)	2.4" (6.1cm)

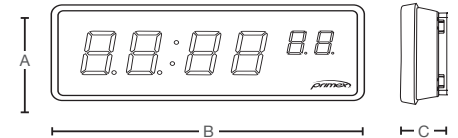


DUAL-MOUNT DIMENSIONS			
Clock Type	Width from Wall	Height from Ceiling	Depth of Two Clocks
	A	B	C
Dual 2.5" (6.4cm), 4-digit	13.8" (35.1cm)	8.0" (20.3cm)	5.9" (15.0cm)
Dual 4" (10.16cm), 4-digit	20.9" (53.1cm)	11.0" (27.9cm)	6.3" (16.0cm)
Dual 2.5" (6.4cm), 6-digit	16.8" (42.7cm)	8.0" (20.3cm)	5.9" (15.0cm)
Dual 4" (10.16cm), 6-digit	NA*	11.0" (27.9cm)	6.3" (16.0cm)

* 4", 6-digit clocks cannot be dual-mounted to the wall.
Note: Dual mount clocks shipped disassembled to simplify installation.

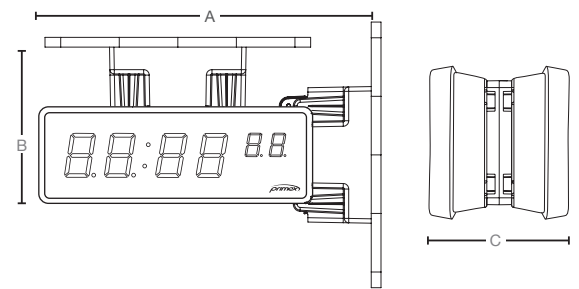

FLUSH-MOUNT DIMENSIONS				
Clock Type	Weight	Width	Height	Depth
		A	B	C
2.5" (6.4cm), 6-digit	2.0 lbs. (0.9 kg)	16.8" (42.7cm)	6.5" (16.5cm)	3.4" (8.6cm)

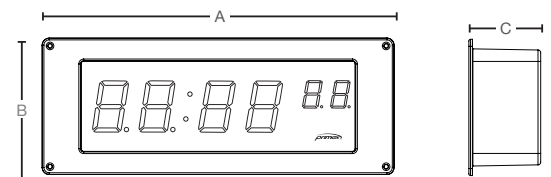

When ordering for new construction projects, the junction boxes for flush-mount installation may be ordered to ship in advance of clocks. Please request special shipping and provide dates when ordering.

To Learn More:
Call 800.537.0464
Email: info@primexinc.com

primexinc.com